


Technical Data

Type	Power [KW] required	Characteristics at BPE		Dimensions	
		flow in m ³ /h	mWh in m	length in mm	weight in kg
WPS 7-3	0.37	7.0	10	276	2.9
WPS 7-4	0.55	7.0	14	300	3.2
WPS 7-6	0.75	7.0	20	349	3.9
WPS 7-9	1.10	7.0	31	421	5.0
WPS 7-13	1.50	7.0	45	517	6.4
WPS 7-16	2.20	7.0	55	590	7.5
WPS 7-19	2.20	7.0	66	662	8.5
WPS 7-23	3.00	7.0	80	759	9.9
WPS 7-26	3.00	7.0	90	831	11.0
WPS 7-29	3.70	7.0	100	903	12.1
WPS 7-32	3.70	7.0	111	976	13.1
WPS 7-34	4.00	7.0	119	1024	13.8
WPS 7-39	5.50	7.0	136	1145	15.6
WPS 7-44	5.50	7.0	153	1266	17.4
WPS 7-49	5.50	7.0	170	1386	19.2
WPS 7-54	7.50	7.0	189	1506	20.9
WPS 7-59	7.50	7.0	205	1828	22.7
WPS 7-64	7.50	7.0	222	1948	24.5

NOTE: Specifications subject to change without notice


MATERIAL OF CONSTRUCTION

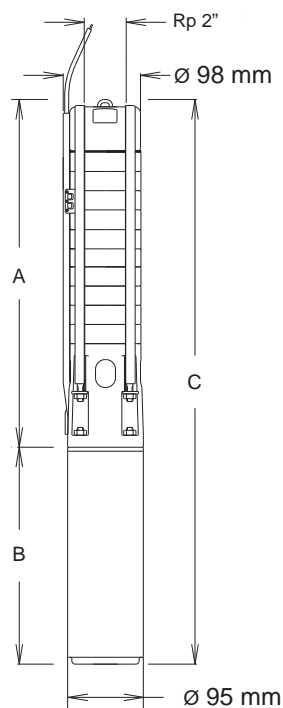

Component	Standard Version	N Version	NE Version
Discharge Chamber	AISI 304	AISI 316	AISI 316
Valve Cone	AISI 304	AISI 316	AISI 316
Valve Seat	NBR/AISI 316	NBR/AISI 316	FKM/AISI 316
Retainer for Valve Seat	NBR/AISI 316	NBR/AISI 316	FKM/AISI 316
Top Diffusor	AISI 304	AISI 316	AISI 316
Spacer	AISI 304	AISI 316	AISI 316
Top Bearing	NBR/AISI 316	NBR/AISI 316	FKM/AISI 316
Diffusor	AISI 304	AISI 316	AISI 316
Impeller	AISI 304	AISI 316	AISI 316
Neck Ring	NBR/AISI 316	NBR/AISI 316	FKM/AISI 316
Intermediate Bearing	NBR	NBR	FKM
Bottom Diffusor	AISI 304	AISI 316	AISI 316
Suction Interconnector	AISI 304	AISI 316	AISI 316
Strainer	AISI 304	AISI 316	AISI 316
Shaft	AISI 304	AISI 316	AISI 316
Coupling	AISI 304	AISI 316	AISI 316
Straps	AISI 304	AISI 316	AISI 316
Cable Guard	AISI 304	AISI 316	AISI 316



Stainless Steel Submersible Pump 4"

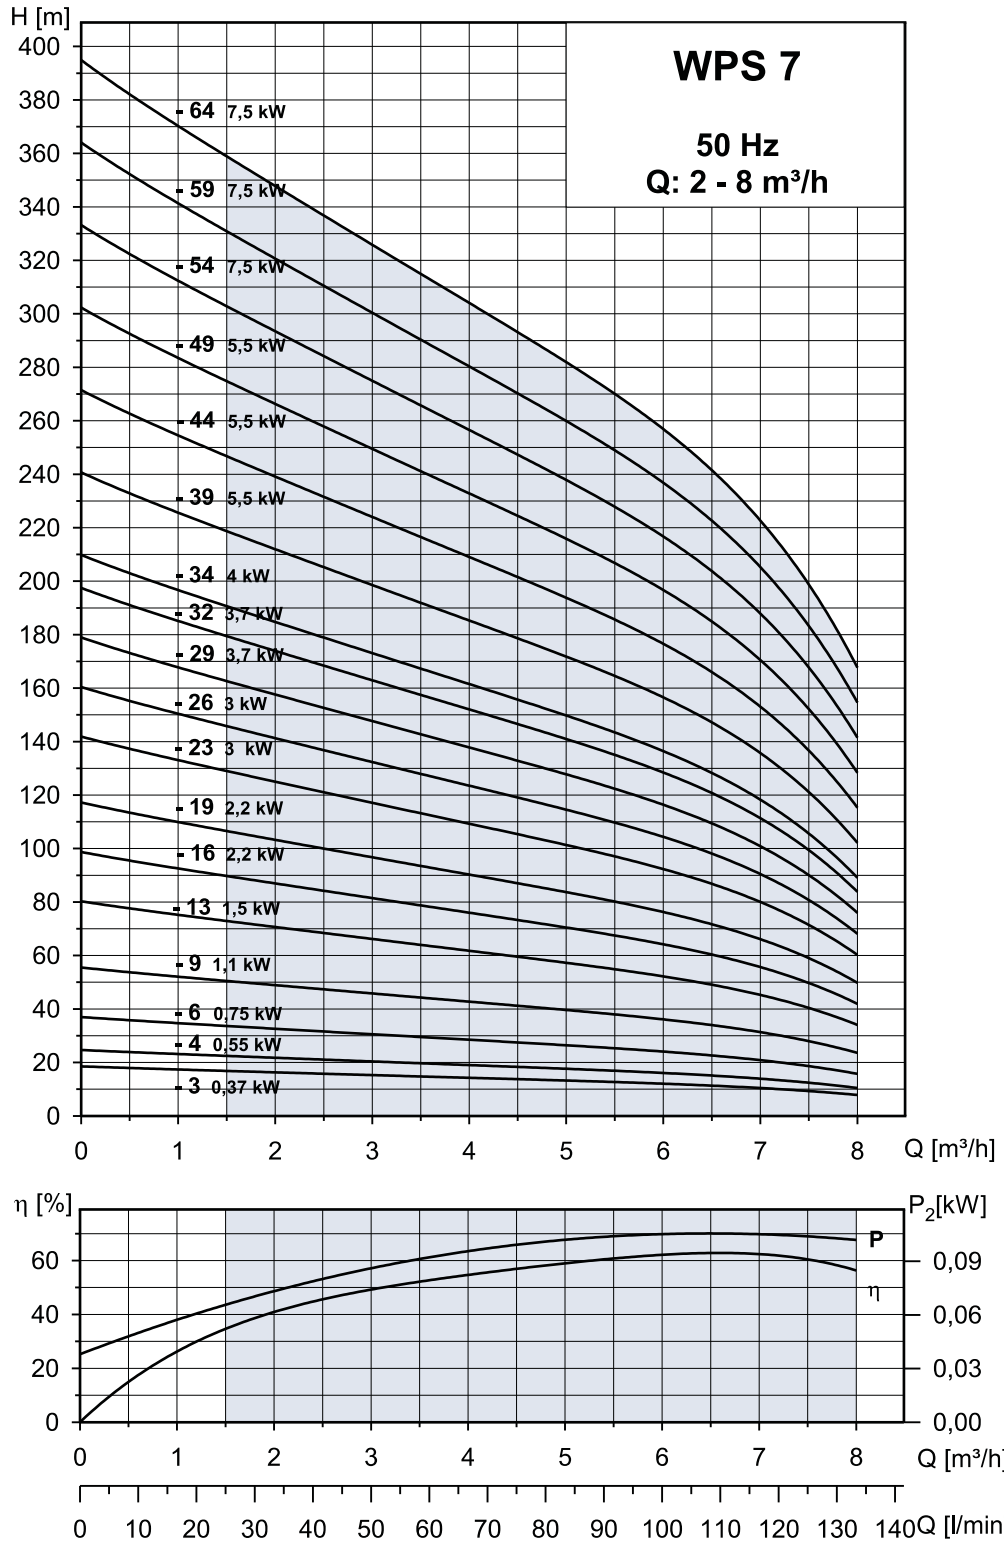

Performance curves conform to ISO 9906 Annex A.